



AUTOMATIONS FOR SWINGING GATES LINEAR TELESCOPIC OPERATOR up to 3 m



230 VAC

- Irreversible and reversible 230 Vac electromechanical geared motor with easy access release from besides.
- Neat design and size, particularly suited to forged iron gates
- Easy and quick to install due to compact size and installation dimensions
- Worm protected by a scraper ring and stainless steel stem, suitable for use in dusty and sandy environments or where there are aggressive atmospheric agents.
- Available in right or left version
- W180 version for residential normal doors.



ARO 220V
Rinosec Control board



VARIO 12/24V
Photocell



VITO 220V
Blinker



Lock
Electrical lock



ARO
Accessories




ARO access
keypad



VITO accessories
Antenna



www.rinosec.com info@rinosec.com

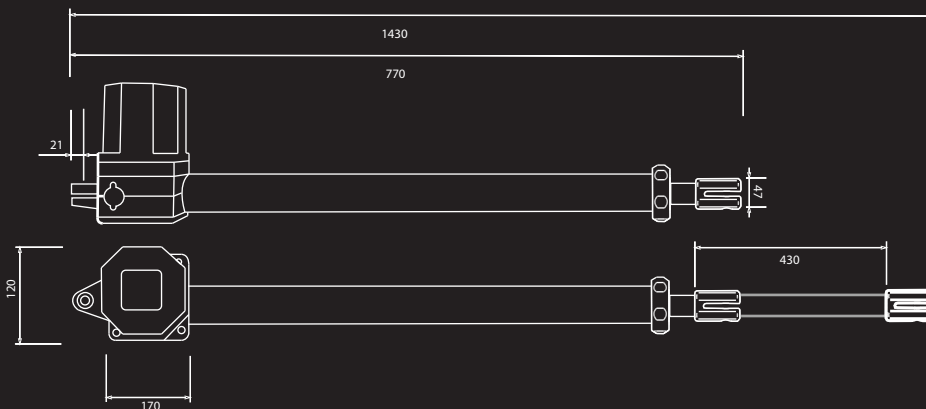

Model	W189
Power supply	230V~ / 50Hz
Max absorption	1,5A
Power absorbed	330W
Capacitor	8µF
Max thrust	3000N
Maximum stroke	430mm
Opening time	19S / °90
Normal weight	300kg
Dutycycle	%60
Operating temperature	-20°C / +55°C
Degree of protection	IP44
Weight (kg)	6.300