



AUTOMATIONS FOR SWINGING GATES LINEAR TELESCOPIC OPERATOR up to 4 m




230 VAC

- Irreversible 230 Vac electromechanical geared motor with easy access release from above
- Neat design and size, particularly suited to forged iron gates
- Easy and quick to install due to compact size and installation dimensions

- Worm protected by a scraper ring and stainless steel stem, suitable for use in dusty and sandy environments or where there are aggressive atmospheric agents.
- Available in right or left version
- W186 version for large doors and confined installation dimensions



UNIMOG 220V
Rinosec Control board



VARIO 12/24V
Photocell



VITO 220V
Blinker



Lock
Electrical lock



UNIMOG
Accessories



VARIO accessories
Bracket




VITO accessories
Antenna



UNIMOG
Push bottom



www.rinosec.com info@rinosec.com

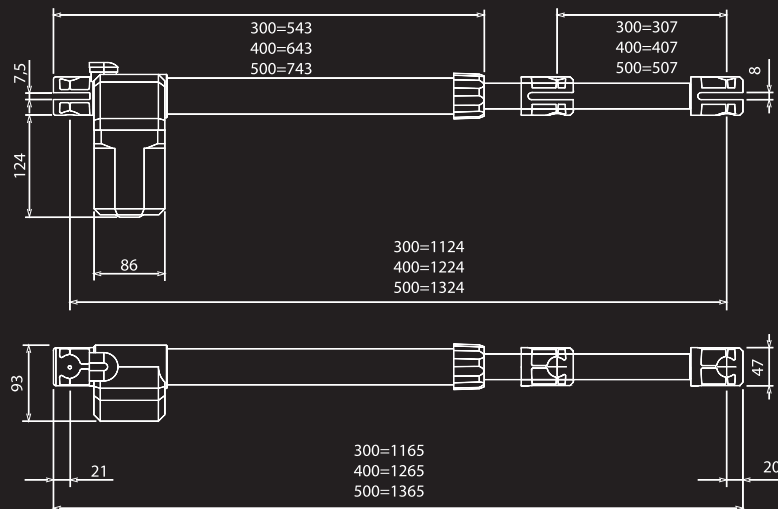

Model	W186 - 300	W186 - 400	W186 - 500
Power supply		230V~ / 50Hz	
Max absorption		1,5A	
Power absorbed		330W	
Capacitor		8µF	
Max thrust		4000N	
Maximum stroke	300mm	400mm	500mm
Opening time	18S / °90	22S / °90	27S / °90
Normal weight	300kg	400kg	500kg
Lifespan		100000 cycles	
Operating temperature		°55+C / °20-C	
Degree of protection		IP44	
Weight (kg)	5,80	6.00	6.20